

Oil-free screw compressors

RSW D / RSWF D

water-injected, with direct drive

 Made in Germany

oil-free 
Made in Germany



Motor power: 18.5 to 120.0 kW



Water-injected screw compressors

RENNER oil-free, water-injected screw compressors are a perfect fit to all applications that require clean compressed air. There is absolutely no risk of oil contamination and resulting production downtime – 100% oil-free compressed air is one of the competitive advantages of these screw compressors.

High reliability as well as low operating and maintenance cost are essential benefits of RENNER RSW compressors.

RENNER water-injected screw compressors of the RSW and RSWF ranges, available from 18.5 to 120.0 kW, have been developed to ensure economic production of oil-free compressed air.

A special feature of these compressors protected by utility patent is reflected by the fact that compressor oil usually applied for cooling, sealing, and lubrication has been completely banished from the process of compression. The oil has been replaced by the most natural of all raw materials: water. Being an ideal heat carrier, water takes away the heat of the compression process and thus ensures low temperatures in the system. The advantage of low temperatures is a nearly isothermal compression which is extraordinarily cost-efficient at high free air delivery.



Due to the structured design all parts are easily accessible.

System water treatment

Full water treatment has been integrated into the compressor system by means of a mixed-bed ion exchanger and a water filter. This makes sure that the circulation water is always of high quality with consistent lubrication and cooling properties. There are no calcium deposits, since all free ions are bound. Continuous monitoring of water quality in water injected machines is crucial and therefore a standard procedure for a RENNER RSW range compressor.

Advantages of a RENNERtronic Plus control system

- automatic adjustment of flow rate
- evaluation and regulation of water quality via automatic conductivity measurements
- also available with real-time clock
- integrated clock with 7 channels
- digital input
- potential-free output
- evaluation of operating and load hours
- fault alarm memory

Including calculation of:

- power consumption
- network pressure within easily adjustable pressure-limits
- air end temperature
- maintenance intervals

Text display and additional LEDs for messages and warnings.



Industry 4.0 Ready

Industry 4.0

Connect your central control system via modbus with RENNER compressors and benefit from extensive possibilities of network data exchange in real time. Whether you want to focus on status monitoring, look at fault reports, or retrieve service messages, all information is available and ready to be gathered. Communication interfaces of the control systems are used between the individual RENNER compressors and secure full access as well as full control of the compressed air station.

Intelligent interconnectedness of the components enables communication between compressed air production, air treatment as well as their optimal adjustment to achieve maximum efficiency.



Cooling

- All RENNER water injected compressors of the RSW range are available both air-cooled and water-cooled.
- The external air-coolers can be installed spatially separated from the compressor.
- Located on the outside, these external air-coolers improve the efficiency of the compressor station considerably. Thanks to that flexible choice of location, space inside the compressor room is gained and expensive exhaust ducts are avoided.
- The RSW machines are simply connected to an existing cooling-water circuit.

Energy savings: Compressors with variable speed control. The RSWF series is characterized by quality and efficiency.

RENNER screw compressors with variable speed control are designed for tough industrial applications. They come with the intelligent control and monitoring system RENNERtronic Plus.


Variable speed control

Often strong fluctuations of air demand cannot be avoided. In such cases RENNER screw compressors with variable speed control guarantee a cost-efficient, steady flow of compressed air according to current demand. The compressor performance matches the actual need for compressed air thanks to variable speed control. This guarantees economic operation. The frequency converter is firmly mounted inside the switch cabinet.


Optimum use of energy: RENNER screw compressors with variable speed control

- use of an efficient control system for compressors
- use of heat recovery systems
- use of advanced compressed air piping systems without leakage
- regular service by factory-trained service technicians

Comparison of oil-free dry-running screws and RENNER RSWF

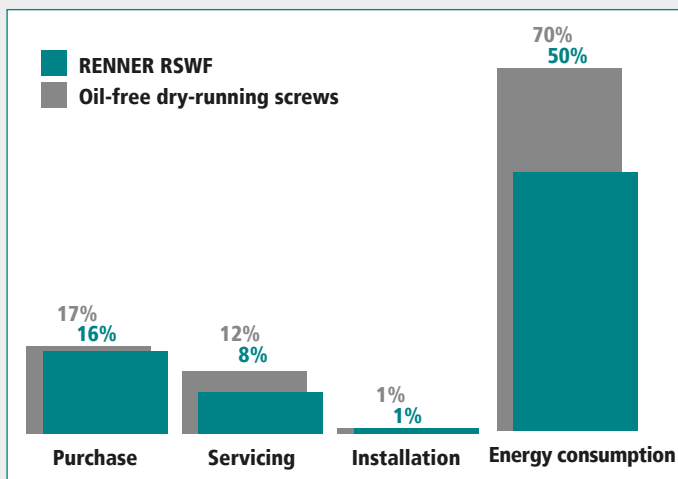

This diagram shows that there is a savings potential of 25% of total cost, if a RENNER RSWF compressor is used instead of an oil-free dry-running screw compressor.

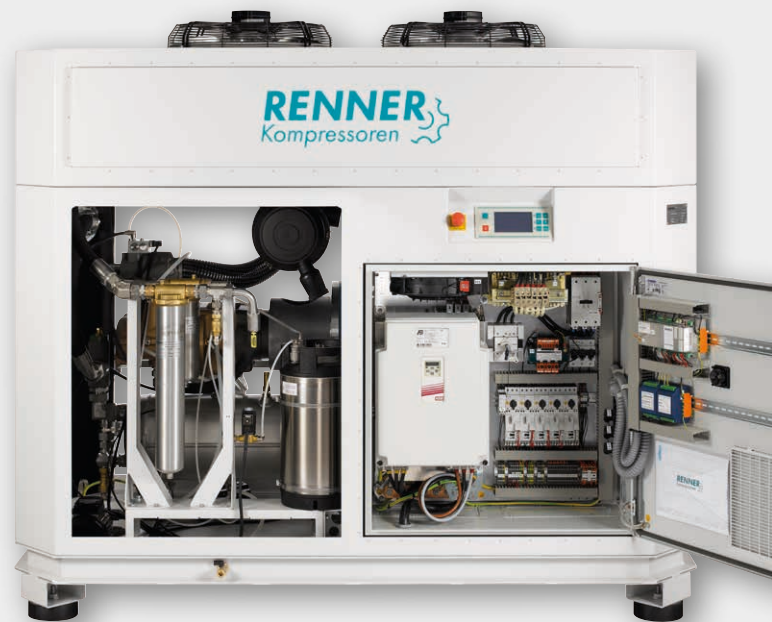


Heat recovery via integrated, highly efficient plate heat exchanger

Calculation of savings potential by using heat recovery

Model	Max. power kW	Potential heat recovery approx. kW	Fuel oil savings per year at 4000 hours per year and round 70% utilization rate litres	Saving per year at 0.55 €/l Euro
RSWF 50,0 D	55	47	14900	8195,-
RSWF 68,0 D	75	63	20000	11000,-
RSWF 85,0 D	88	75	23900	13145,-
RSWF 90,0 D	94	80	25400	13970,-
RSWF 120,0 D	118	100	31700	17270,-

Usable energy through heat recovery

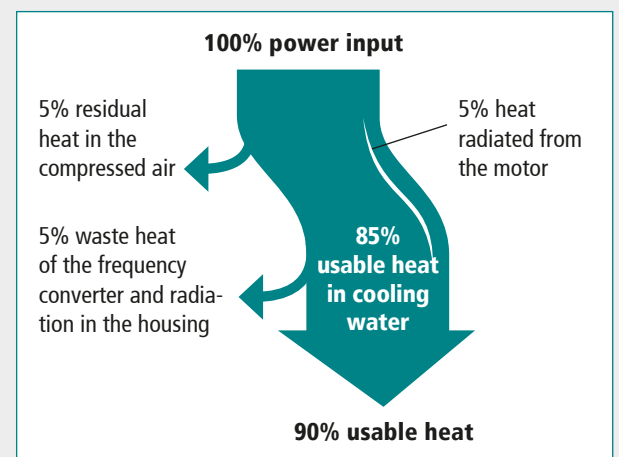

RENNER in motion

Water-injected screw compressors work at low temperatures which results in the following advantages:

- **increased free air delivery**
- **less maintenance**
- **better efficiency**

Besides efficiency, plant operators demand high quality of compressed air according to their standards. Oil-free air production provides this quality and even represents a very cost-efficient alternative, when you take into account the risk of contamination by oil.

We can guaranty safety and reliability by using RENNER water-injected screws. Our purity requirement „100% oil-free compressed air“ is important for many of our customers in various sectors like food and beverage, research and development, pharmaceuticals and chemicals, automotive and electronics.

Many food and food packaging items come in contact with compressed air and will therefore be tested for hydrocarbons by quality control. Oil-free RENNER compressors eliminate the danger of contamination. Risk minimization and operational safety are essential, economic advantages of the RSW range.

Quality certificate SGS Institut Fresenius (excerpt)

- No additional oil vapors or oil particles were found in the exiting compressed air.
- Despite the detected input concentration of bacteria and fungi, the exiting compressed air was free of any microbiological contaminants and therefore sterile.
- The result of the measurement of the particle contamination at the intake and at the compressed air outlet confirmed that the initial particle contamination of the tested compressed air system was reduced by more than 99%.



Operating principle of RSWF screw compressors from 6-13 bar (REflex)

All RENNER compressors with variable speed control adapt in frequency and FAD flexibly and automatically to the current pressure. Thus, the compressor delivers optimum FAD within the set pressure range (6-13 bar) at all times.

- FAD and control range automatically adapt to the current pressure.
- Speed and workload limit of the motor are observed.
- If pressure drops due to higher compressed air demand, the REflex-function releases reserves that increase FAD.
 - ▶ Thus sufficient air supply is guaranteed.
- The pressure range of 6-13 bar can be variably adjusted.

Water-injected screw compressors 18.5 – 40.0 kW, water-cooled

RENNER's water-injected screws from 18,5 to 40 kW are available both air-cooled and water-cooled. The external air-water-cooler WKH allows for greatest possible flexibility, since the actual cooling of the compressor can be taken to a suitable location. Use of waste heat in winter can be realized easily.

**More flexibility,
less risk!**



Frequency converter WKH

RENNER's reliable air end combined with a new, direct-driven design

- more free air delivery due to direct drive
- more flexibility due to innovative cooling concept
- small footprint
- pressure range from 6 to 13 bar




Air-water-cooler WKH

Water-injected screw compressors 18.5 – 40.0 kW, air-cooled

Water separator, water filter, and the patented system for the safe degassing of the system water ensure the best water quality. This guarantees a long service life of the compressor. The conductivity sensor continuously monitors the consistently high water quality.

- 1** Air-water-cooler
- 2** High-efficiency IE3/IE4 motor
- 3** Coupling
- 4** Slide bearings protection
- 5** Water separator
- 6** Air end
- 7** Intake control
- 8** Air filter

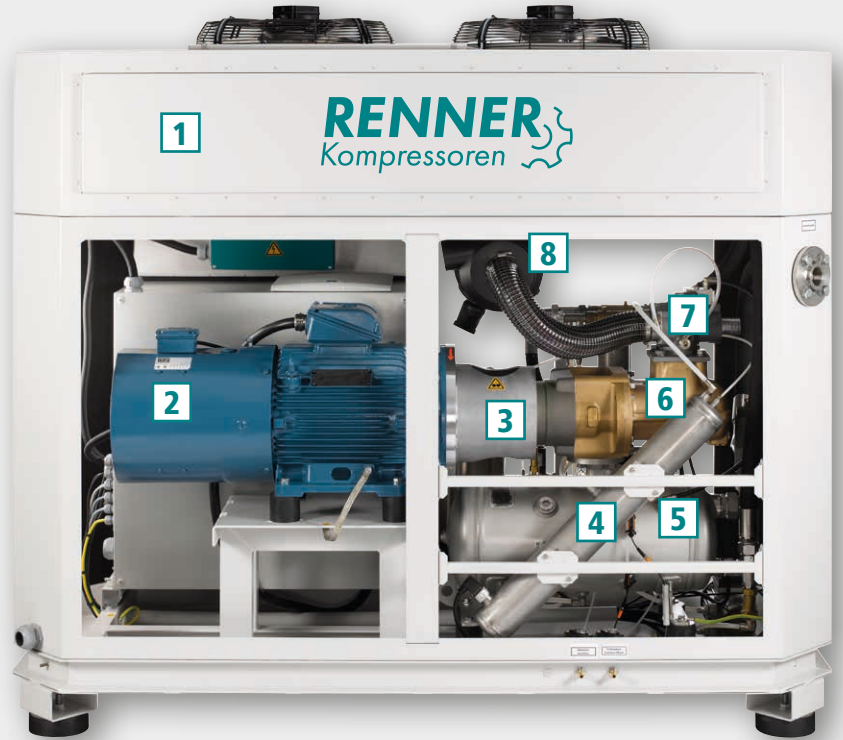

RSW 18,5 – 22,0 D / RSWF 26,0 – 40,0 D

Model	Free air delivery								Motor power		Com-pressed air outlet	Dimensions L x W x H	Weight	Cooling
	6 bar		8 bar		10 bar		13 bar							
	m³/min	cfm	m³/min	cfm	m³/min	cfm	m³/min	cfm	kW	HP	inch	mm	kg	
RSW 18,5 D	3.10	110	3.05	108	3.00	106	–	–	18.5	25	G1½	2182 x 942 x 1333	620	Water
RSW 18,5 D	3.10	110	3.05	108	3.00	106	–	–	18.5	25	G1½	2182 x 942 x 1850	740	Air
RSW 22,0 D	3.10	110	3.05	108	3.00	106	2.95	10.4	22.0	29	G1½	2182 x 942 x 1333	630	Water
RSW 22,0 D	3.10	110	3.05	108	3.00	106	2.95	10.4	22.0	29	G1½	2182 x 942 x 1850	750	Air
RSWF 26,0 D	1.75-4.30	62-152	2.00-4.20	71-148	2.20-3.90	78-138	–	–	26.0	35	G1½	2182 x 942 x 1333	860	Water
RSWF 26,0 D	1.75-4.30	62-152	2.00-4.20	71-148	2.20-3.90	78-138	–	–	26.0	35	G1½	2182 x 942 x 1850	990	Air
RSWF 40,0 D	1.75-6.30	62-222	2.00-6.00	71-212	2.20-5.40	78-191	2.70-4.80	95-170	40.0	54	G1½	2182 x 942 x 1333	950	Water
RSWF 40,0 D	1.75-6.30	62-222	2.00-6.00	71-212	2.20-5.40	78-191	2.70-4.80	95-170	40.0	54	G1½	2182 x 942 x 1850	1070	Air


D = direct drive Air-cooled compressors are supplied with integrated chiller.

Standard features: RENNERtronic Plus, mixed-bed ion exchanger ensures integrated water treatment, water quality is continuously monitored, water filter with DVGW-approval

Technical changes reserved.

Water-injected screw compressors 37.0 – 120.0 kW, water-cooled

The design of RENNER RSW compressors guarantees easy access to all maintenance relevant components. The side covers are detachable to provide excellent access to all maintenance points. Furthermore the cost of maintenance is reduced by the low number of movable parts.

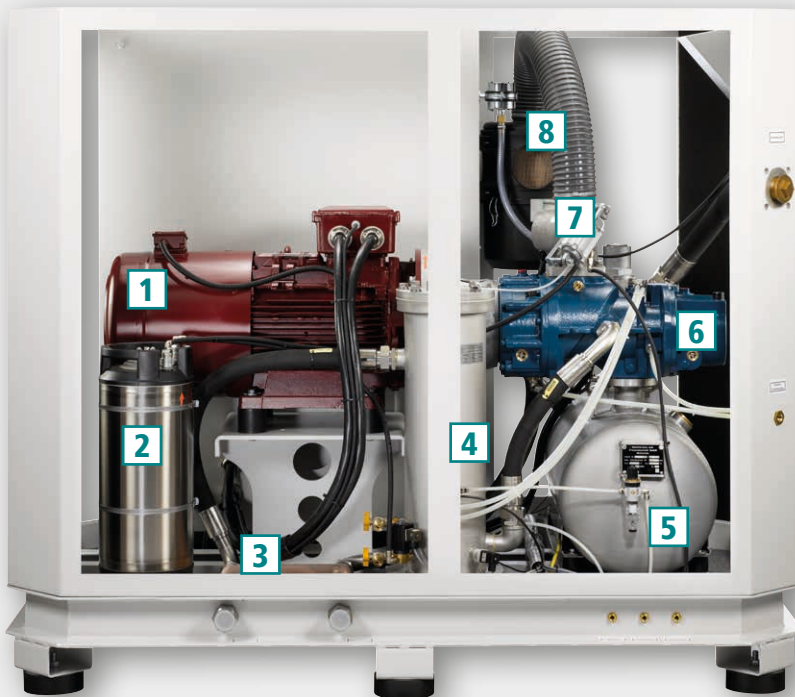

- 1** High-efficiency IE3/IE4 motor
- 2** Mixed-bed ion exchanger
- 3** Heat exchanger
- 4** Water filter
- 5** Water separator
- 6** Air end
- 7** Intake control
- 8** Air filter

Easy to service

- short service times, long service intervals
- low maintenance cost
- excellent accessibility
- easily detachable covers

RSW 37,0 – 75,0 D / RSWF 37,0 – 120,0 D

Model	Free air delivery								Motor power	Compressed air outlet	Dimensions L x W x H	Weight	Secondary cooler ⁽¹⁾	
	6 bar		8 bar		10 bar		13 bar							
	m ³ /min	cfm	m ³ /min	cfm	m ³ /min	cfm	m ³ /min	cfm						kW
RSW 37,0 D	5.80	205	5.65	200	5.60	198	–	–	37.0	49	G2	2111 x 1329 x 1754	1520	WKH 40
RSW 45,0 D	5.80	205	5.65	200	5.60	198	5.40	191	45.0	60	G2	2111 x 1329 x 1754	1550	WKH 50
RSW 75,0 D	12.00	424	11.85	418	11.75	415	11.50	406	75.0	100	G2½	2561 x 1632 x 1853	2050	2 x WKH 40
RSWF 37,0 D	1.55-7.10	55-251	1.55-6.49	55-229	1.55-5.54	55-196	1.55-4.77	55-168	37.0	49	G2	2111 x 1329 x 1754	1580	WKH 40
RSWF 45,0 D	1.55-8.00	55-283	1.55-7.74	55-273	1.55-6.58	55-233	1.55-5.65	55-200	45.0	60	G2	2111 x 1329 x 1754	1650	WKH 50
RSWF 50,0 D	1.55-10.30	55-381	1.55-9.60	55-339	1.55-8.00	55-282	–	–	50.0	67	G2	2111 x 1329 x 1754	1650	WKH 50
RSWF 68,0 D	1.55-11.25	55-397	1.55-11.20	55-396	1.55-10.25	55-362	–	–	68.0	91	G2	2111 x 1329 x 1754	1650	2 x WKH 40
RSWF 85,0 D	1.55-12.40	55-438	1.55-12.36	55-436	1.55-12.17	55-430	1.55-10.17	55-359	85.0	114	G2	2111 x 1329 x 1754	1750	2 x WKH 50
RSWF 90,0 D	3.41-16.60	120-586	3.41-15.80	120-558	3.41-14.30	120-505	3.41-11.90	120-420	90.0	35	G2½	2561 x 1632 x 1853	2280	2 x WKH 50
RSWF 120,0 D	3.41-20.60	120-727	3.41-20.30	120-717	3.41-17.65	120-623	3.41-15.40	120-544	120.0	54	G2½	2561 x 1632 x 1853	2390	3 x WKH 40

D = direct drive

⁽¹⁾ not included (please order appropriate secondary coolers and pump modules for air-cooled models)

Standard features: RENNERtronic Plus, mixed-bed ion exchanger ensures integrated water treatment, water quality is continuously monitored, water filter with DVGW-approval

Technical changes reserved.

COMPRESSED AIR FOR ALL APPLICATIONS



RENNER GmbH Kompressoren, a family run business established in 1994, develops and assembles economical and energy-efficient compressors. A broad range of compressed air accessories are also part of the product portfolio. The structure and size of the company ensure flexible decisions and short lead times, thus providing optimal focus on the requirements of the customers.

THE RENNER MANUFACTURING AND SUPPLY PROGRAMME:

We can supply you with the right compressor for any application – guaranteed.

SCREW COMPRESSORS:

- from 2.2 to 355 kW
- up to 40 bar, e.g. for manufacture of PET bottles
- compact systems with air receiver, refrigeration dryer, and variable speed control
- heat exchanger integrated or as an external box
- special applications: gas compression, operation of drilling devices, rail, and special-purpose vehicles
- customized models designed to customer specifications

OIL-FREE COMPRESSORS:

- SCROLL compressors for oil-free compressed air from 1.5 to 30.0 kW
- water-injected screw compressors for oil-free compressed air in breathing air quality from 18.5 to 120 kW



PISTON COMPRESSORS:

- from 1.5 to 11.0 kW
- stationary or mobile, with or without sound insulation

CONTROL SYSTEMS:

- compressor control systems
- superordinate control systems
- state-of-the-art web server monitoring



COMPRESSED AIR ACCESSORIES:

- air filters, air receivers, refrigeration dryers, adsorption dryers, condensate drains, and oil-water-separators

Your RENNER distributor:

RENNER GmbH · Kompressoren

Emil-Weber-Strasse 32
D-74363 Gueglingen

Phone +49 (0) 7135 93193-0
Fax +49 (0) 7135 93193-50

E-Mail: info@renner-kompressoren.de
www.renner-kompressoren.de



Reg.-Nr.: Q1 0205013

